




MODELO	CAPACIDAD NOMINAL			HP MOTOR	DIMENSIONES (Pulgadas)			PESOS (LBS.) Aprox.	
	Toneladas	BTU/hr	GPM		ANCHO	LARGO	ALTO	Embarque	Operación
ODX-1000-0241-X-H	202	3,030,000	605	7.5	203.5	104	144.13	7,012.84	10,938.90
ODX-1000-0266-X-H	224	3,360,000	672	10	203.5	104	144.13	7,096.04	11,022.10
ODX-1000-0301-X-S	259	3,885,000	778	15	203.5	104	144.13	7,117.35	11,043.41
ODX-1000-0330-X-S	285	4,275,000	855	20	203.5	104	144.13	7,150.89	11,076.95
ODX-1000-0294-X-H	252	3,780,000	755	10	219.75	116	147.13	7,570.74	12,291.08
ODX-1000-0340-X-H	294	4,410,000	882	15	219.75	116	147.13	7,653.05	12,373.39
ODX-1000-0375-X-H	328	4,920,000	985	20	219.75	116	147.13	7,794.19	12,514.53
ODX-1000-0400-X-H	356	5,340,000	1,067	25	219.75	116	147.13	7,999.15	12,719.49
ODX-1000-0413-X-S	358	5,370,000	1,075	20	232	128	147.13	8,727.23	14,360.57
ODX-1000-0440-X-S	391	5,865,000	1,172	25	232	128	147.13	8,932.19	14,565.53
ODX-1000-0354-X-H	297	4,455,000	890	10	280	128	147.13	10,256.40	17,161.40
ODX-1000-0405-X-H	351	5,265,000	1,054	15	280	128	147.13	10,446.31	17,351.31
ODX-1000-0447-X-H	394	5,910,000	1,183	20	280	128	147.13	10,479.85	17,384.85
ODX-1000-0480-X-S	431	6,465,000	1,292	25	280	128	147.13	10,684.81	17,589.81
ODX-1000-0507-X-S	461	6,915,000	1,382	30	280	128	147.13	10,739.81	17,644.81
ODX-1000-0459-X-H	382	5,730,000	1,147	15	292	150.5	149.1	11,885.47	20,415.34
ODX-1000-0506-X-H	432	6,480,000	1,295	20	292	150.5	149.1	11,919.01	20,448.88
ODX-1000-0549-X-H	474	7,110,000	1,422	25	292	150.5	149.1	12,118.89	20,648.76
ODX-1000-0583-X-S	510	7,650,000	1,531	30	292	150.5	149.1	12,098.68	20,628.55
ODX-1000-0585-X-H	513	7,695,000	1,540	25	292	150.5	162.13	12,418.26	20,968.85
ODX-1000-0625-X-S	552	8,280,000	1,657	30	292	150.5	162.13	12,498.83	21,049.42
ODX-1000-0682-X-S	622	9,330,000	1,865	40	295	150.5	164.19	12,834.38	21,535.45
ODX-1000-0705-X-S	665	9,975,000	1,995	50	295	150.5	164.19	12,887.34	21,588.41
ODX-1000-0727-X-S	681	10,215,000	2,044	40	294	140	205.88	14,753.93	22,930.16
ODX-1000-0790-X-S	726	10,890,000	2,178	50	294	140	205.88	14,799.93	22,976.16
ODX-1000-0833-X-S	774	11,610,000	2,321	60	294	140	205.88	14,973.31	22,968.96
ODX-1000-0875-X-S	788	11,820,000	2,364	75	294	140	205.88	15,039.31	23,034.96
ODX-1000-0808-X-S	736	11,040,000	2,208	40	294	150.5	205.88	15,597.30	24,762.93
ODX-1000-0852-X-S	798	11,970,000	2,395	50	294	150.5	205.88	15,643.30	24,808.93
ODX-1000-0880-X-S	853	12,795,000	2,558	60	294	150.5	205.88	15,816.68	24,982.31
ODX-1000-0955-X-S	909	13,635,000	2,726	75	294	150.5	205.88	16,090.23	25,075.28
ODX-1000-0885-X-H	838	12,570,000	2,515	40	294	150.5	226.69	17,399.60	26,496.61
ODX-1000-0937-X-S	908	13,620,000	2,725	50	294	150.5	226.69	17,451.14	26,548.15
ODX-1000-0990-X-S	967	14,505,000	2,902	60	294	150.5	226.69	17,625.01	26,722.02
ODX-1000-1070-X-S	1,042	15,630,000	3,125	75	294	150.5	226.69	17,896.72	26,993.73
ODX-1000-1250-X-S	1,171	17,565,000	3,512	60	318	170	284.5	21,327.29	32,478.39
ODX-1000-1348-X-S	1,263	18,945,000	3,790	75	318	170	284.5	21,395.85	32,546.95
ODX-1000-1465-X-S	1,393	20,895,000	4,179	100	318	170	284.5	21,756.52	32,907.62

IM SERIE 1000
Capacidad nominal
605 a 4,179 GPM @
95°F / 85°F / 78°F

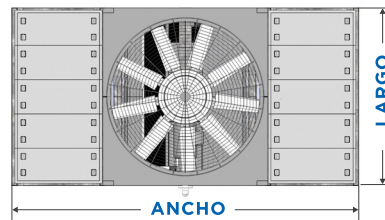

CAPACIDAD TÉRMICA CERTIFICADA POR EL COOLING TECHNOLOGY INSTITUTE.
La línea completa de torres IM Serie 1000 está certificada por el CTI bajo el STD-201.

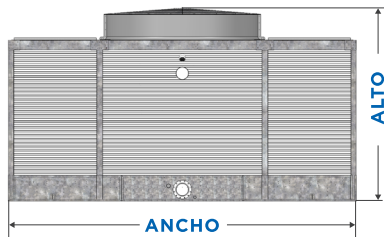